


10" Oil Filled Motors

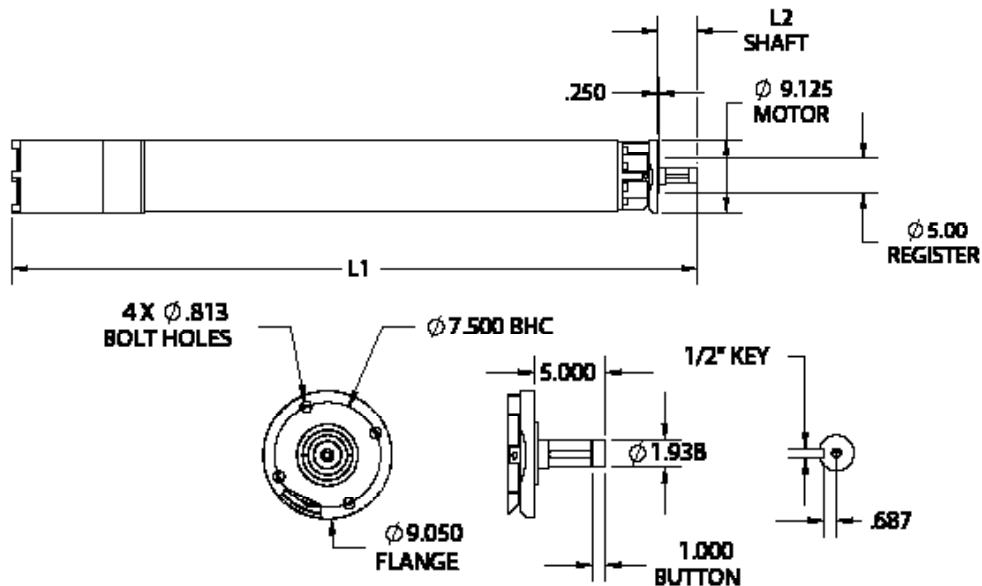

10"

10" Dimensions

Horsepower	L1	L2*	Horsepower	L1	L2
50	57.86"	5.00"	150	65.27"	5.00"
100	74.37"	5.00"	175	80.87"	5.00"
150	86.13"	5.00"			

*All Rentzel Energy motor stickups are 4" plus a 1" button = 5" total

10" Performance Data

460 Volt/ 3 Phase/ 60 Hertz

Model #	Rated HP	Full Load RPM	Volts	Full Load Amps	Full Load Eff	Full Load P.F%	3/4 Load Eff	3/4 Load P.F%	1/2 Load Eff	1/2 Load P.F%
AI1050460	50	1750	460	74	85	74	86	60	86	57
AI12100460	75	1750	460	109	86	74	86	60	85	57
AI12125460	100	1745	460	148	85	74	86	60	86	57
AI12150460	125	1750	460	183	86	74	87	60	87	57
AI12175460	150	1755	460	221	86	74	87	60	87	57

Engineering Data, actual performance may vary

Mailing Address
 PO Box 21540
 Mesa, AZ 85277
 (480)-832-0700
 (480)-832-0888 Fax
 www.rentzelenergy.com

Physical Address
 5550 E Mcdowell Road
 Mesa, AZ 85215

